

产品说明



特点：内置轴承，可自由环绕中轴作360°高速旋转

基本材料：铜

最高使用压力：1.0MPa可用于真空系统(真空度100KPa以下)

适合软管材料：尼龙及PU


标准型带密封剂

表面经镀镍处理，不会产生铜离子

KS系列旋转力矩/旋转速度


适合软管外径(mm)	4	6	8	10	12
旋转力矩(N.m)	0.006	0.012	0.014	0.020	0.022
允许最高转速(转数/分钟)	500	500	400	300	250

直通旋转接头：KSH

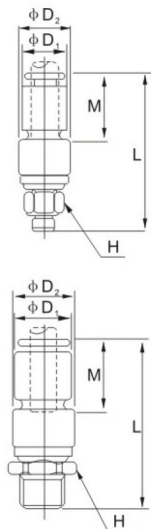

适用外径mm	型号	螺纹	H六角对边	D ₁	D ₂	L	M
φ4	KSH04-M5	M5×0.8	8	10.4	12	36.5	16
	KSH04-M6	M6×1.0				37	
	KSH04-01S	1/8"	12			38	
φ6	KSH06-M5	M5×0.8	8	12.8	14	37.5	17
	KSH06-M6	M6×1.0				38	
	KSH06-01S	1/8"	14			39.5	
φ8	KSH08-01S	1/8"	17	15.2	17	44	18.5
	KSH08-02S	1/4"				47	
	KSH08-03S	3/8"				48	
φ10	KSH10-02S	1/4"	22	18.5	22	54	21
	KSH10-03S	3/8"				55	
	KSH10-04S	1/2"				57.5	
φ12	KSH12-03S	3/8"	24	20.9	24	57	22
	KSH12-04S	1/2"				60	

弯通旋转接头：KSL

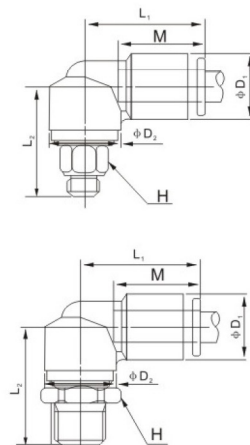

适用外径mm	型号	螺纹	H六角对边	D ₁	D ₂	L ₁	L ₂	M
φ4	KSL04-M5	M5×0.8	8	10.4	12	21	20.5	16
	KSL04-M6	M6×1.0					21	
	KSL04-01S	1/8"	12				22	
φ6	KSL06-M5	M5×0.8	8	12.8	14	23	21	17
	KSL06-M6	M6×1.0					21.5	
	KSL06-01S	1/8"	14				23	
φ8	KSL08-01S	1/8"	17	15.2	17	26	26.5	18.5
	KSL08-02S	1/4"					29.5	
	KSL08-03S	3/8"					31	
φ10	KSL10-02S	1/4"	22	18.5	22	31.5	34	21
	KSL10-03S	3/8"					35	
	KSL10-04S	1/2"					38	
φ12	KSL12-03S	3/8"	24	20.9	24	34	36.5	22
	KSL12-04S	1/2"					39.5	